




**VÁLVULA DE CUCHILLO
WAFFER BIDIRECCIONAL**

ACERO INOXIDABLE
NR CLASE 150




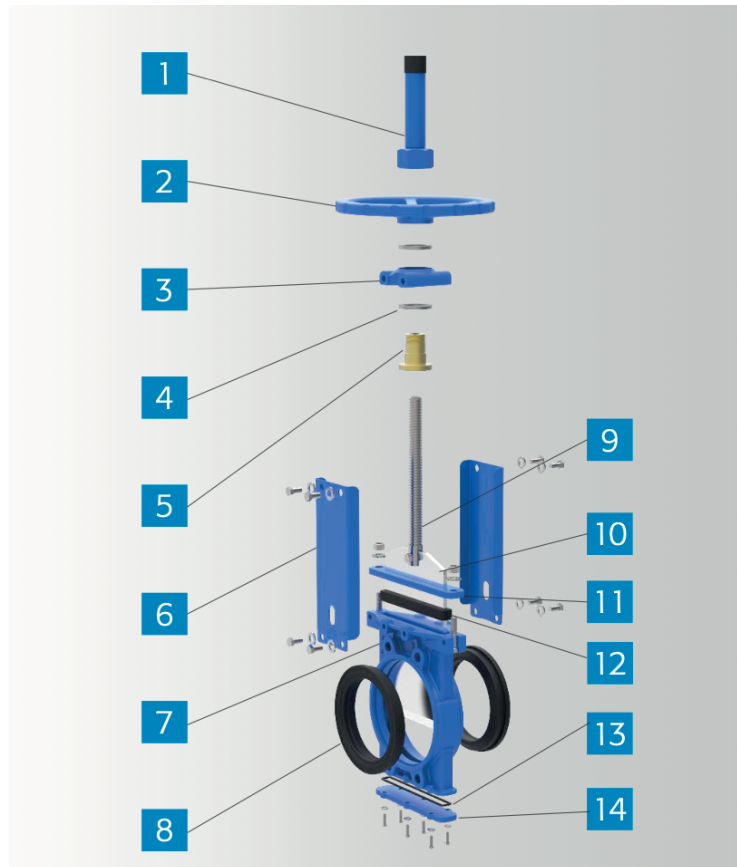

Code	Name	Material	QTY
1	Handle Cover	Steel	1
2	Handle Wheel	GGG40	1
3	Yoke Flange	GGG40	1
4	Bearing	Gcr15	2
5	Nut	Brass	N
6	Yoke	Q235	2
7	Body	GGG40	1
8	Seat	NR+Steel	2
9	Stem	SS420/SS304/SS16	1
10	Bolt&Nut	Fe+Zn(Painting)/SS304	N
11	Packing Gland	WCB	1
12	Packing	Rubber	1
13	Packing	Rubber	1
14	Bottom Gland	WCB	1



DIMENSION

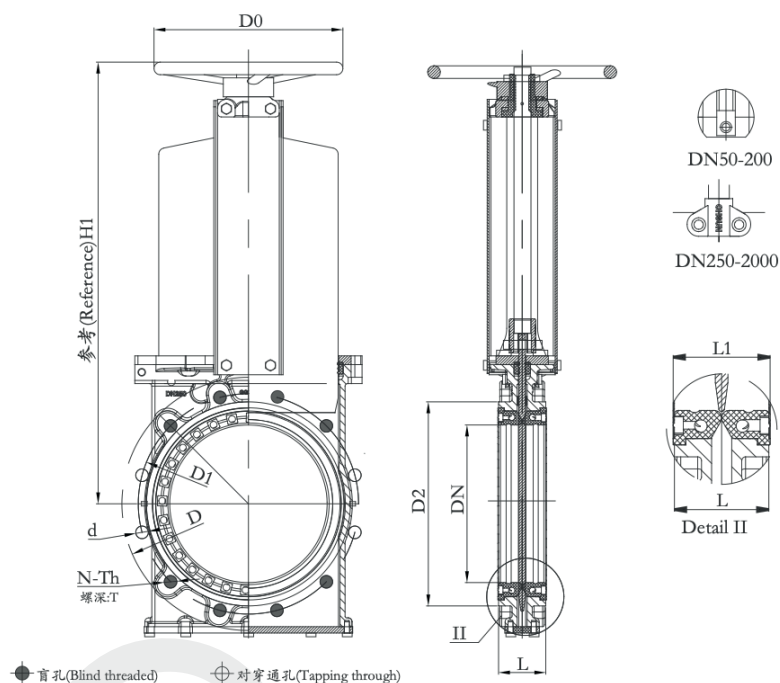

PN10


ANSI 150LB

FVSVVALVE

DN	L	D	D1	D2	D0	N-Th	d	H1	DN	L	D	D1	D2	D0	N-Th	d	H1
50	53	165	125	99	180	4-M16	Ø18	260	2"	53	152	121	92	180	4-5/8"	Ø19	260
65	53	185	145	118	200	4-M16	Ø18	292	2-1/2"	53	178	140	105	200	4-5/8"	Ø19	292
80	56.5	200	160	132	200	8-M16	Ø18	320	3"	56.5	191	153	127	200	4-5/8"	Ø19	320
100	56.5	220	180	156	240	8-M16	Ø18	358	4"	56.5	229	191	157	240	8-5/8"	Ø19	358
125	63	250	210	184	260	8-M16	Ø18	395	5"	63	254	216	186	260	8-3/4"	Ø22	395
150	62	285	240	211	280	8-M20	Ø23	450	6"	62	279	242	216	280	8-3/4"	Ø22	450
200	76.5	340	295	266	300	8-M20	Ø23	532	8"	76.5	343	299	270	300	8-3/4"	Ø22	532
250	75.5	395	350	319	320	12-M20	Ø23	670	10"	75.5	406	362	324	320	12-7/8"	Ø25	670
300	84	445	400	370	350	12-M20	Ø23	758	12"	84	483	432	381	350	12-7/8"	Ø25	758
350	84	505	460	429	400	16-M20	Ø23	857	14"	84	533	476	413	400	12-1"	Ø29	857
400	99	565	515	480	450	16-M24	Ø27	946	16"	99	597	540	470	450	16-1"	Ø29	946
450	99	615	565	530	500	20-M24	Ø27	1023	18"	99	635	578	533	500	16-1 1/8"	Ø32	1023
500	129	670	620	582	500	20-M24	Ø27	Gear	20"	129	699	635	584	500	20-1 1/8"	Ø32	Gear
550	129	725	680	638	-	20-M27	Ø30	Gear	22"	129	750	692	641	-	20-1 1/4"	Ø35	Gear
600	129	780	725	682	-	20-M27	Ø30	Gear	24"	129	813	750	691	-	20-1 1/4"	Ø35	Gear
700	142	895	840	794	-	24-M27	Ø30	Gear	28"	142	927	864	800	-	28-1 1/4"	Ø35	Gear
800	142	1015	950	901	-	24-M30	Ø33	Gear	32"	142	1060	978	914	-	28-1 1/2"	Ø41	Gear



PN10 Wafer Flange Threaded and Tapping Hole

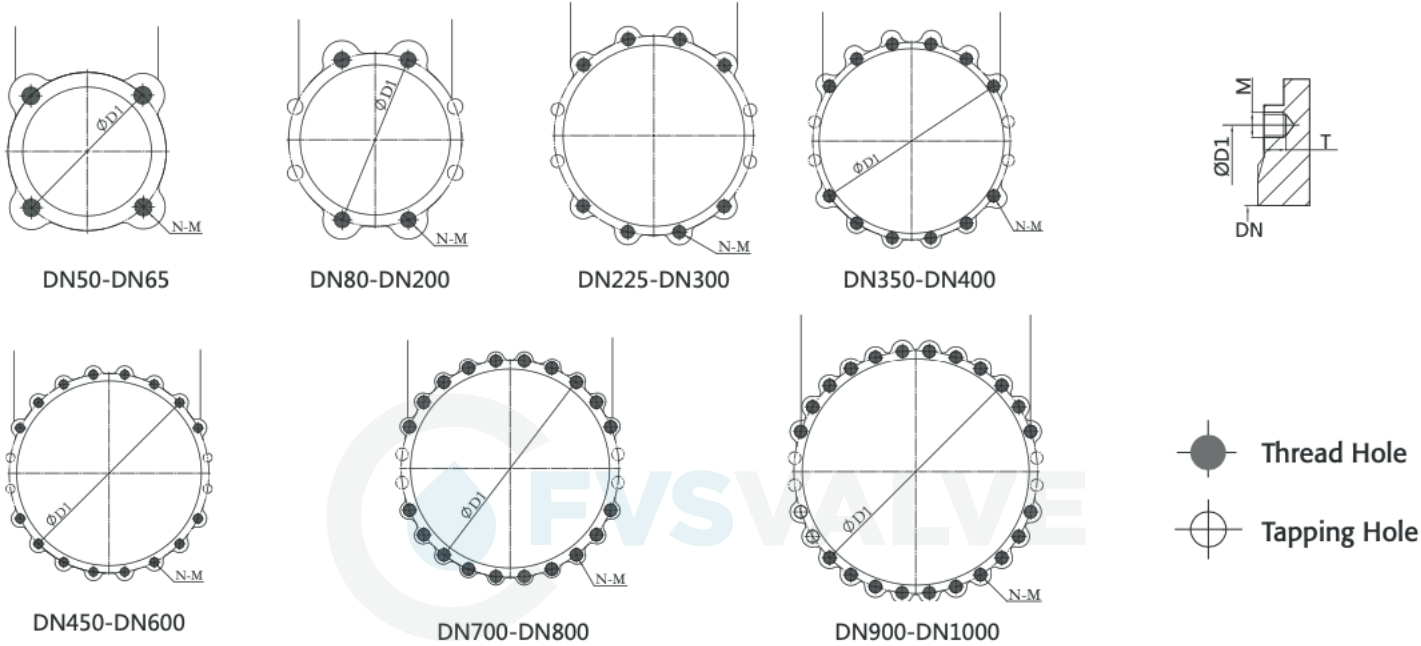


PN10


DN	D1	N	M	T	Thread Hole	Tapping Hole
50	125	4	M16	13	2	2
65	145	4	M16	13	2	2
80	160	8	M16	13	2	6
100	180	8	M16	13	2	6
125	210	8	M16	16	2	6
150	240	8	M16	16	2	6
200	295	8	M20	20	2	6
225	310	12	M20	20	4	8
250	350	12	M20	20	4	8
300	400	12	M20	20	4	8
350	460	16	M20	20	8	8
400	515	16	M24	24	8	8
450	565	20	M24	24	16	4
500	620	20	M24	24	16	4
550	680	20	M27	24	16	4
600	725	20	M27	27	16	4
700	840	24	M27	27	20	4
800	950	24	M30	30	20	4
900	1050	28	M30	30	24	4
1000	1160	28	M33	33	24	4




PN10 Wafer Flange Threaded and Tapping Hole




DN50-DN80





DN100-DN200




DN250-DN350




DN400-DN450




DN500-DN600



DN650



DN700-DN800



ANSI 150LB

DN	D1	N	M	T	Thread Hole	Tapping Hole
2"(DN50)	121	4	M5/8-11	13	4	0
2-1/2"(DN65)	140	4	M5/8-11	13	4	0
3"(DN80)	153	4	M5/8-11	13	4	0
4"(DN100)	191	8	M5/8-11	13	4	4
5"(DN125)	216	8	M3/4-10	16	4	4
6"(DN150)	242	8	M3/4-10	16	4	4
8"(DN200)	299	8	M3/4-10	20	4	4
10"(DN250)	362	12	M7/8-9	20	8	4
12"(DN300)	432	12	M7/8-9	20	8	4
14"(DN350)	476	12	M1-8	20	8	4
16"(DN400)	540	16	M1-8	24	12	4
18"(DN450)	578	16	M1 1/8-7	24	12	4
20"(DN500)	635	20	M1 1/8-7	24	16	4
22"(DN550)	692	20	M1 1/4-7	24	16	4
24"(DN600)	750	20	M1 1/4-7	27	16	4
26"(DN650)	806	24	M1 1/4-7	27	20	4
28"(DN700)	864	28	M1 1/4-7	27	24	4
30"(DN750)	914	28	M1 1/4-7	27	24	4
32"(DN800)	978	28	M1 1/2-6	30	24	4





2023 Fullvalves Company. Todos los derechos reservados. fullvalves.com