




**VÁLVULA DE CUCHILLO
LUG UNIDIRECCIONAL FVS**

ACERO INOXIDABLE 316
EPDM / CLASE 150

ACERO INOXIDABLE 316
METAL / CLASE 150



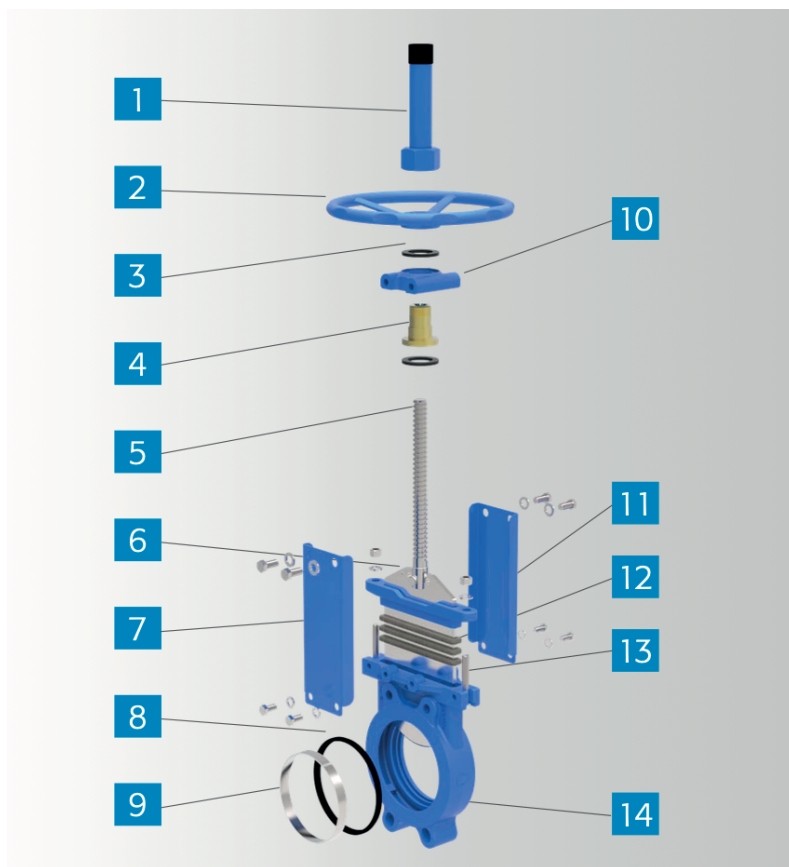

Code	Name	Material	QTY
1	Handle Cover	Q235+Painting	1
2*	Hand Wheel	GGG40	1
3	Bearing	ZChSnSb10-6	2
4	Stem Nut	Brass	1
5	Stem	2Cr13/SS304/SS316	1
6	Disc	SS304/SS316/F55/2205	1
7	Yoke	Q235	1
8	Seat	EPDM/NBR/PTFE/Metal	1
9	Seat Cover	SS304/SS316	1
10	Yoke Head	GGG40	1
11	Packing Gland	WCB/CF8	1
12	Packing	Aramid PTFE	3-5
13	Bolt	Fe+Zn With Painting/SS304	N
14	Body	WCB/GGG40/CF8/CFM8	1


*electric, pneumatic, hydraulic, sprocket, electro-hydraulic, gear available





2023 Fullvalves Company. Todos los derechos reservados. fullvalves.com

DIMENSION

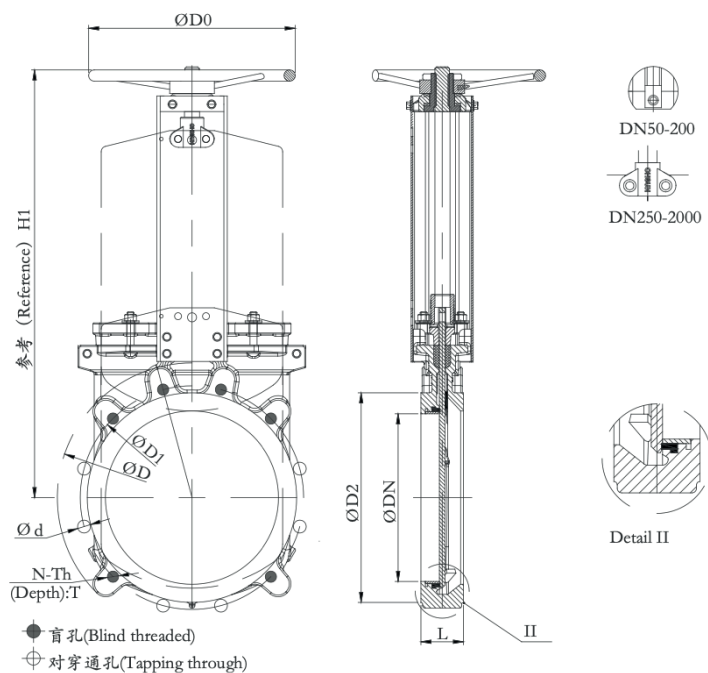

DIN2632 PN10


DN	L	D	D1	D2	D0	N-Th	d	H1
50	48	165	125	99	180	4-M16	Ø18	260
65	48	185	145	118	200	4-M16	Ø18	292
80	51	200	160	132	200	8-M16	Ø18	320
100	51	220	180	156	240	8-M16	Ø18	358
125	57	250	210	184	260	8-M16	Ø18	395
150	57	285	240	211	280	8-M20	Ø23	450
175	57	305	265	237	280	12-M20	Ø23	504
200	70	340	295	266	300	8-M20	Ø23	532
250	70	395	350	319	320	12-M20	Ø23	670
300	76	445	400	370	350	12-M20	Ø23	758
350	76	505	460	429	400	16-M20	Ø23	857
400	89	565	515	480	450	16-M24	Ø27	946

ANSI 150LB

DN	L	D	D1	D2	D0	N-Th	d	H1
2"	48	152	121	92	180	4-5/8"	Ø19	260
2-1/2"	48	178	140	105	200	4-5/8"	Ø19	292
3"	51	191	153	127	200	4-5/8"	Ø19	320
4"	51	229	191	157	240	8-5/8"	Ø19	358
5"	57	254	216	186	260	8-3/4"	Ø22	395
6"	57	279	242	216	280	8-3/4"	Ø22	450
8"	70	343	299	270	300	8-3/4"	Ø22	532
10"	70	406	362	324	320	12-7/8"	Ø25	670
12"	76	483	432	381	350	12-7/8"	Ø25	758
14"	76	533	476	413	400	12-1"	Ø29	857
16"	89	597	540	470	450	16-1"	Ø29	946



PN10 Threaded hole and Tapping hole

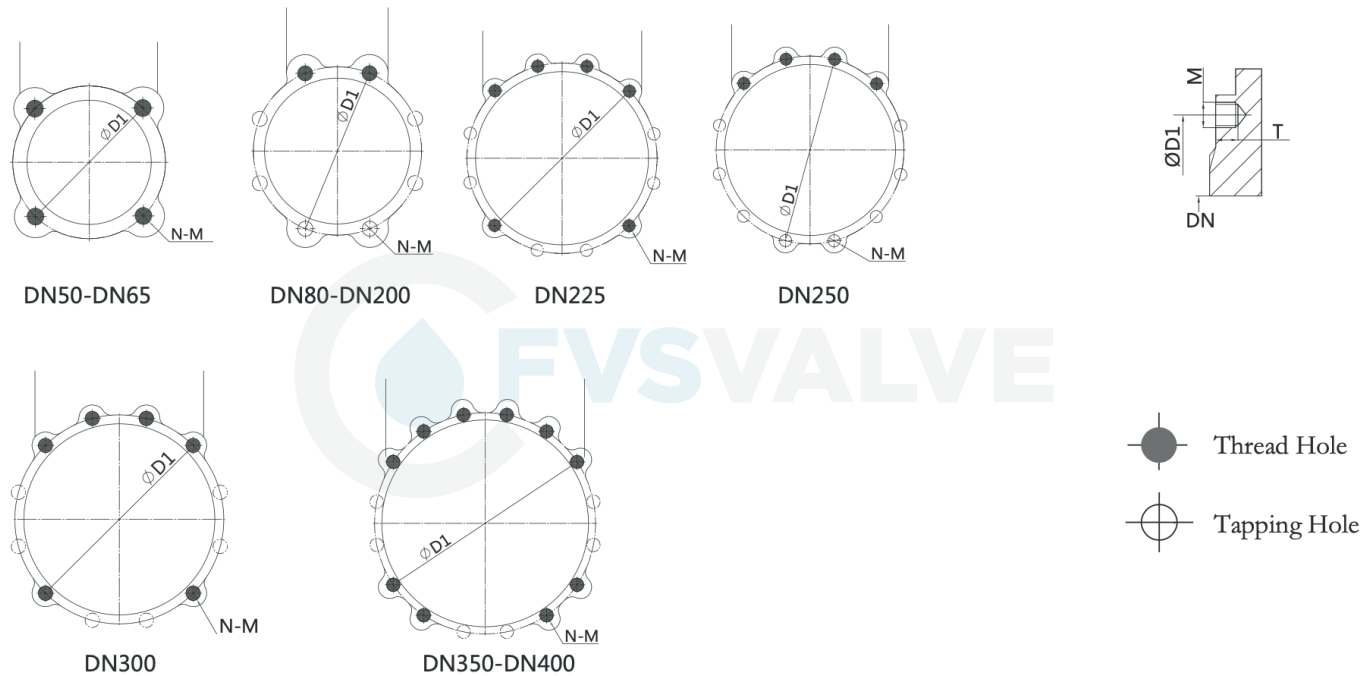


PN10

DN	D1	N	M	T	Thread Hole	Tapping Hole
50	125	4	M16	13	2	2
65	145	4	M16	13	2	2
80	160	8	M16	13	2	2
100	180	8	M16	13	2	2
125	210	8	M16	16	2	2
150	240	8	M16	16	2	2
200	295	8	M20	20	2	2
225	310	12	M20	20	6	6
250	350	12	M20	20	4	8
300	400	12	M20	20	6	6
350	460	16	M20	20	10	6
400	515	16	M24	24	10	6



150LB Threaded hole and Tapping hole

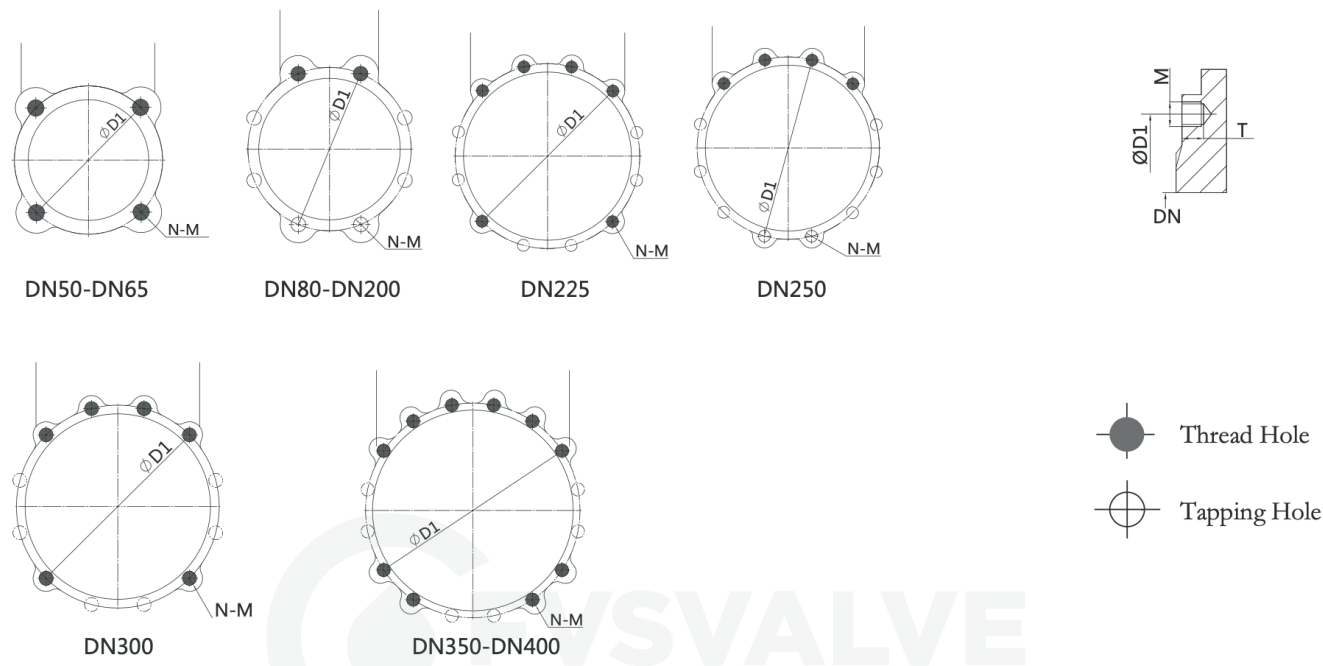

ANSI 150LB

DN	D1	N	M	T	Thread Hole	Tapping Hole
2"(DN50)	121	4	M5/8-11	13	2	2
2-1/2"(DN65)	140	4	M5/8-11	13	2	2
3"(DN80)	153	4	M5/8-11	13	2	2
4"(DN100)	191	8	M5/8-11	13	2	6
5"(DN125)	216	8	M3/4-10	16	2	6
6"(DN150)	242	8	M3/4-10	16	2	6
8"(DN200)	299	8	M3/4-10	20	2	6
10"(DN250)	362	12	M7/8-9	20	2	6
12"(DN300)	432	12	M7/8-9	20	6	6
14"(DN350)	476	12	M1-8	20	6	6
16"(DN400)	540	16	M1-8	24	10	6

