





VÁLVULA COMPUERTA
ACERO CARBONO A216 WCB
CLASE 150

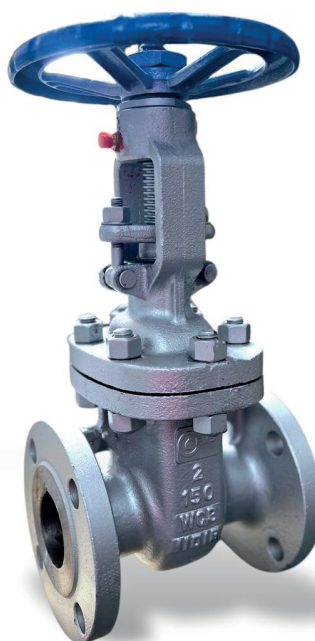

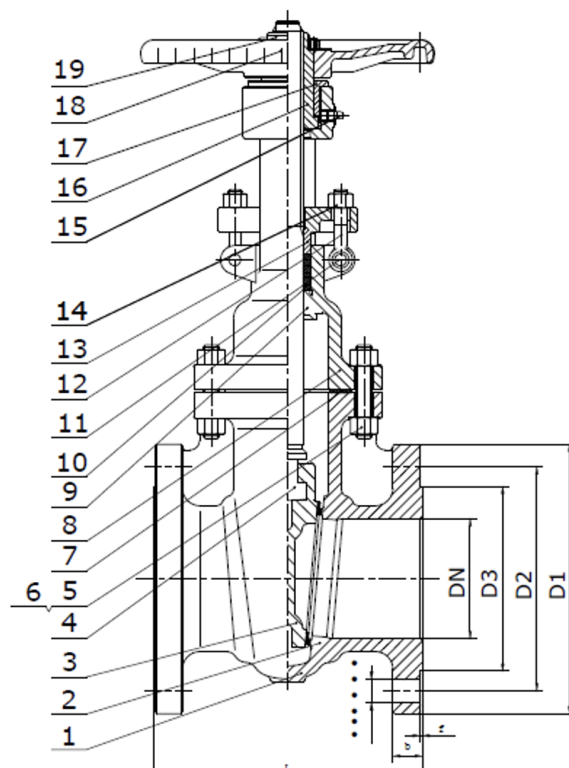

Nº	PART NAME	MATERIAL
1	Body	ASTM A216 WCB
2	Seat Ring	ASTM A216 WCB + 13% Cr
3	Disc	ASTM A216 WCB + 13% Cr
4	Stem	ASTM A276 420
5	Bonnet Nut	ASTM A194 2H
6	Bonnet Bolt	ASTM A139 B7
7	Gasket	SS304+Graphite
8	Bonnet	ASTM A216 WCB
9	Backseat Bushing	ASTM A216 WCB + 13 Cr
10	Packing	Flexible Graphie
11	Eyebolt Pin	Carbon Steel
12	Gland Eyebolt	Carbol Steel
13	Gland	ASTM A216 WCB
14	Nut	ASTM A194 2H
15	Niple	Brass
16	Stem Nut	ZcuA110Fe3
17	Yoke Sleeve Nut	Carbon Steel
18	Hand Wheel	Ductile Cast Iron
19	Handwheel Nut	Carbon Steel



STANDARDS:

- 1 FACE TO FACE: ASME B16.10
- 2 FLANGED END: ASME B16.5 RF
- 3 PRESSURE TEMPERATURE RATINGS: ASME B16.34
- 4 PRESSURE TEST: API 598

SPECIFICATION STANDARD SHEET

Shell Test Pressure	3.0	Mpa
High Pressure Seal Test	2.2	
Backseat Seal Test	2.2	
Air Test Pressure	0.6	
Applicable Medium	Water, Steam, Oil, etc	
Pº máx:	20 Bar Tmáx: 425°C Tmin: -29°C	

DIMENSIONS (mm)

L (z)	NPS	DN	D	D1	Dz	b	z- d	f
178	2"	50	150	120.7	92	16.3	4-19	2
190	2 ½"	65	180	139.7	105	17.9	4-19	2
203	3"	80	190	152.4	127	19.5	4-19	2
229	4"	100	230	190.5	157	24.3	8-19	2
254	5"	125	255	215.9	186	24.3	8-22	2
267	6"	150	280	241.3	216	25.8	8-22	2
292	8"	200	345	298.5	270	29	8-22	2
330	10"	250	405	362	324	30.6	12-25.4	2
356	12"	300	485	431.8	381	32.2	12-25.4	2





2024 Fullvalves Company. Todos los derechos reservados. fullvalves.com