




VÁLVULA GLOBO

ACERO INOXIDABLE SS316

CLASE 150



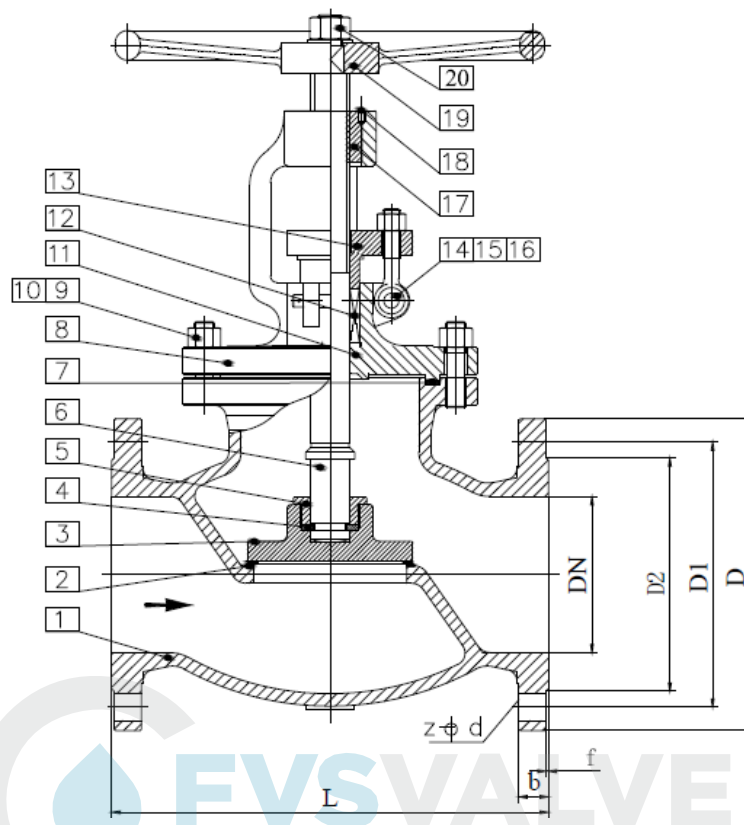

N°	PART NAME	MATERIAL
1	Body	CF8M
2	Seat Ring	SS316
3	Disc	SS316
4	Split Ring	SS316
5	Disc Cover	SS316
6	Stem	SS316
7	Gasket	316S S. Jacketed Graphite
8	Bonnet	CF8M
9	Stud	SS304
10	Nut	SS304
11	Backseat	CF8M
12	Packing	Graphite
13	Gland	SS304
14	Pin	SS304
15	Gland Bolt	SS304
16	Gland Nut	SS304
17	Stem Nut	ZcuA110Fe3
18	Screw	SS
19	Handwheel	ASTM A47
20	H.W Lock Nut	SS304



STANDARDS:

- 1 FACE TO FACE DIMENSION: ASME B16.10
- 2 FLANGED END: ASME B16.5 RF
- 3 PRESSURE TEMPERATURE RATINGS: ASME B16.34
- 4 PRESSURE TEST: API 598

SPECIFICATION STANDARD SHEET

Shell Test Pressure	3.0 Mpa
High Pressure Seal Test	2.2 Mpa
Backseat Seal Test	2.2 Mpa
Air Test Pressure	0.6 Mpa
Applicable Medium	Water, Steam, Oil, etc
P° máx:	20 Bar Tmáx: 425°C Tmin: -29°C

DIMENSIONS (mm)

LH	NPS	DN	D	D1	Dz	b	z-d	f
203	2"	50	150	120.7	92	16.3	4-19	2
216	2 ½"	65	180	139.7	105	17.9	4-19	2
241	3"	80	190	152.4	127	19.5	4-19	2
292	4"	100	230	190.5	157	24.3	8-19	2
356	5"	125	255	215.9	186	24.3	8-22	2
406	6"	150	280	241.3	216	25.8	8-22	2
495	8"	200	345	298.5	270	29	8-22	2
622	10"	250	405	362	324	30.6	12-25.4	2
698	12"	300	485	431.8	381	32.2	12-25.4	2





2024 Fullvalves Company. Todos los derechos reservados. fullvalves.com